

## Steca PR

### PR 1010, PR 1515, PR 2020, PR 3030

The Steca PR 10-30 series of charge controllers is the highlight in the range.

The latest charging technologies, combined with a Steca-AtonIC state of charge determination which has been significantly improved once again, result in optimal battery maintenance and control of the module output of up to 900 Wp which can be connected to it. A large display informs the user about all operating modes with the aid of symbols. The state of charge is represented visually in the form of a tank display. Data such as voltage, current and state of charge can also be displayed digitally as figures on the display. In addition, the controller has an energy meter which can be reset by the user.

CLASSIC



#### Product features

- Hybrid controller
- State of charge determination with Steca AtonIC (SOC)
- Automatic detection of voltage
- PWM control
- Multistage charging technology
- Load disconnection depending on SOC
- Automatic load reconnection
- Temperature compensation
- Common positive grounding or negative grounding on one terminal
- Integrated data logger
- Night light and morning light function
- Integrated self test
- Monthly maintenance charge

#### Electronic protection functions

- Overcharge protection
- Deep discharge protection
- Reverse polarity protection of module, load and battery
- Automatic electronic fuse
- Short circuit protection of load and module
- Overvoltage protection at module input
- Open circuit protection without battery
- Reverse current protection at night
- Overtemperature and overload protection
- Battery overvoltage shutdown

#### Displays

- Graphical LCD display
- ~ for operating parameters, fault messages, self test

#### Operation

- Simple menu-driven operation
- Programming by buttons
- Manual load switch



#### Certificates

- Approved by the World Bank for Nepal
- Compliant with European Standards (CE)
- RoHS compliant
- Made in Germany
- Developed in Germany
- Manufactured according to ISO 9001 and ISO 14001

#### Options

- Prepayment interface
- External temperature sensor
- Alarm contact

10 A...30 A

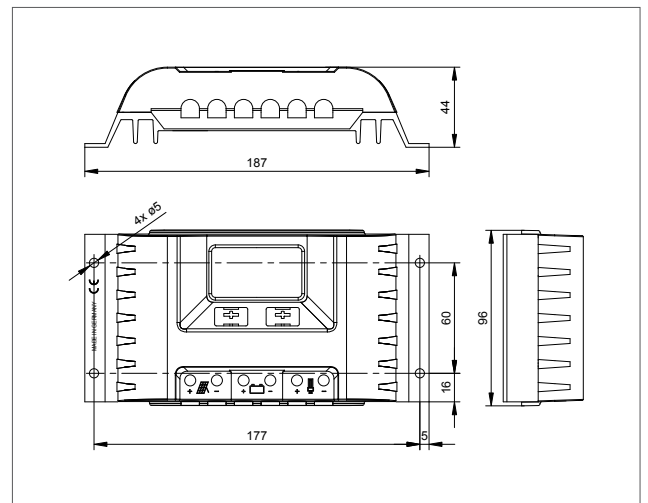

	PR 1010	PR 1515	PR 2020	PR 3030
<b>Characterisation of the operating performance</b>				
System voltage	12 V (24 V)			
Own consumption	12.5 mA			
<b>DC input side</b>				
Open circuit voltage solar module	< 47 V			
Module current	10 A	15 A	20 A	30 A
<b>DC output side</b>				
Load current	10 A	15 A	20 A	30 A
End of charge voltage	liquid 13.9 V (27.8 V); gel 14.1 V (28.2 V)			
Boost charge voltage	14.4 V (28.8 V)			
Equalisation charge	14.7 V (29.4 V)			
Reconnection voltage (SOC / LVR)	> 50 % / 12.6 V (25.2 V)			
Deep discharge protection (SOC / LVD)	< 30 % / 11.1 V (22.2 V)			
<b>Operating conditions</b>				
Ambient temperature	-10 °C ... +50 °C			
<b>Fitting and construction</b>				
Set battery type	liquid (adjustable via menu)			
Terminal (fine / single wire)	16 mm <sup>2</sup> / 25 mm <sup>2</sup> - AWG 6 / 4			
Degree of protection	IP 32			
Dimensions (X x Y x Z)	187 x 96 x 44 mm			
Weight	350 g			

Technical data at 25 °C / 77 °F



**Steca PA TS10**  
External  
temperature sensor

Areas of application:

